

HongKong A.L Lighting Limited

Website: <http://www.flatledpanellights.com>

Model No.: AL-BKL30W-R05

Specification

Parameters:

		Picture	
Input voltage	AC85V-265V		
frequency	50HZ-60HZ		
Total harmonic distortion	≤9%		
Power factor	>0.5 / >0.9		
Output voltage	30-36V		
Output Current	900mA		
Led Q'TY	150PCS SMD2835		
Total power of the led	30W		
LED light effect	80LM/W		
Brand of led chip	Epistar		
Light efficiency	Above 80%~90%		
Evenness degree	>0.6		
Related color temperature	WW		3000K-3500K
	NW		4000K-4500K
	CW		6000K-6500K
Color rendering	Ra > 80		
LED chip Junction Temp	≤85℃		
Operation temperature	-40℃~+55℃		
Storage temperature	-25℃~+65℃		
Grade of protection	IP65		
Beam angle	180degree		
Connecting wire for the driver	Brown	“L” live line	
	Blue	“N” neutral line	
	Yellow or Yellow-green	“G” earth line	
Dimensions	300x300x90mm		
NW. / GW.	1.35KG/1.5KG		
Packing size	51x33x34cm(5pcs)		
Housing color	White/ Black/ Grey		

Parameters:

1. Super bright SMD2835 LED as lighting sources, high efficiency, energy-saving, eco-friendly
2. Side-emitting design to form a surface emitting effect
3. Built-in motion sensor, more intelligently, conveniently and energy-saving
4. Die cast aluminum housing offering high impact capability and strength. PC as cover offering excellent light transmission
5. Compact structure boosting strong shock resistance, high corrosion resistance, IP65, waterproof, dustproof and rust-proof
6. Built-in, wide voltage input constant current driver to enable installation around the world
7. Convenient installation methods allowing for application even in dusty and moist locations both indoor and outdoor

Dimensions:

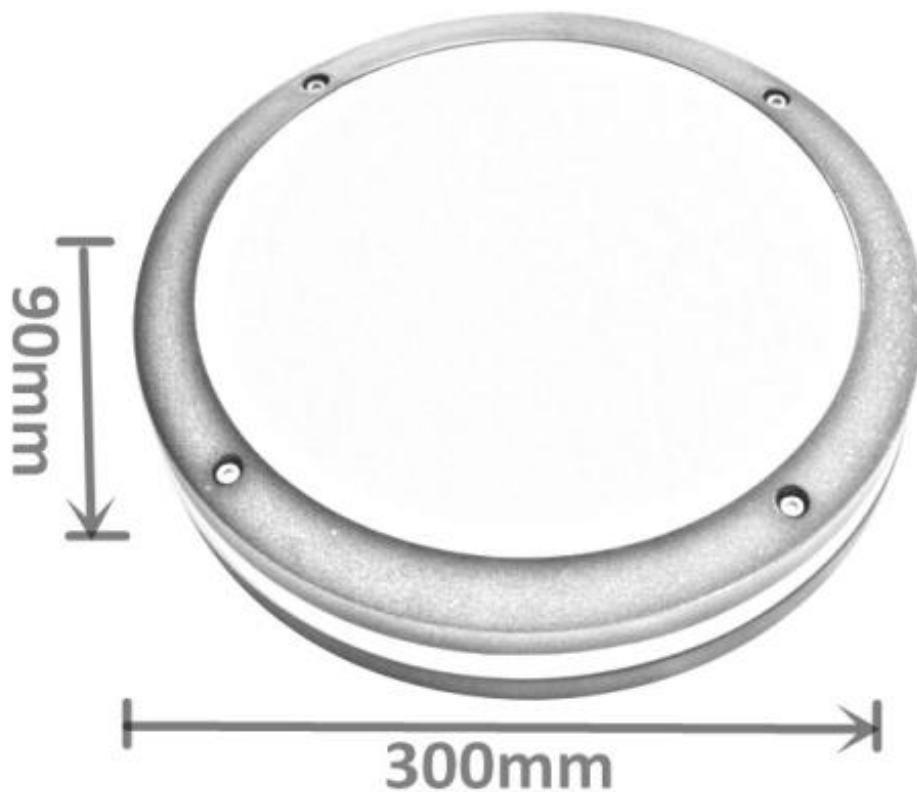


Photo show:



Application:

Bathroom, Kitchen, Spa room, Balcony


Hotel hall or room lighting, Shopping mall lighting

Under cabinet lighting, Display case lighting

Artwork lighting, Board lighting, Accent lighting

Cabinet and under counter lighting

LUMINOUS INTENSITY DISTRIBUTION

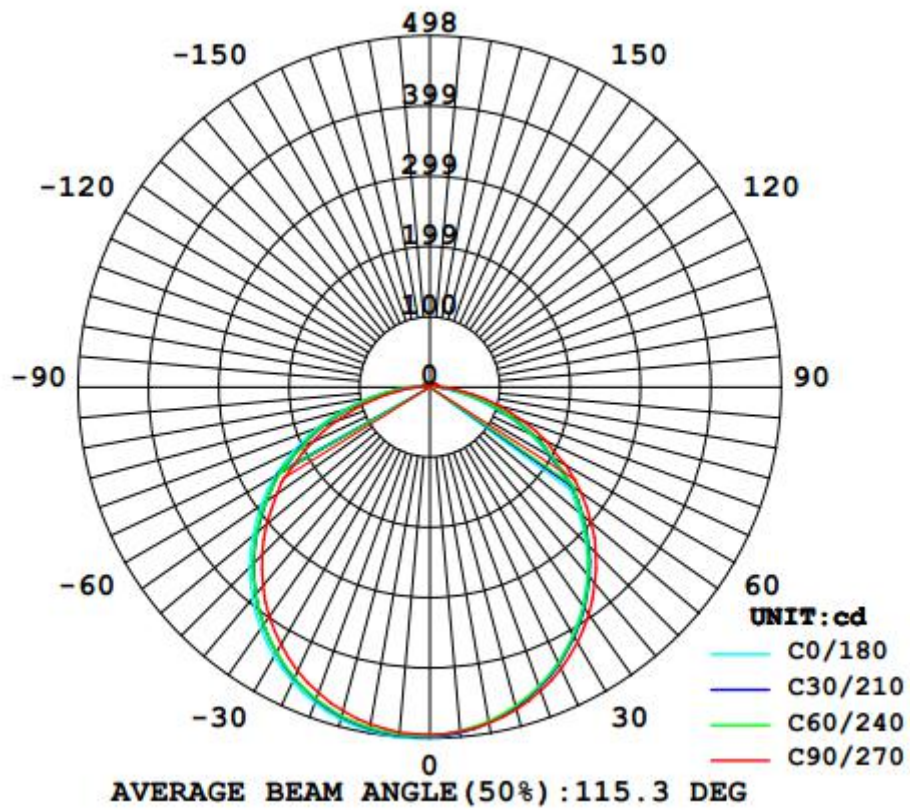

LUMINOUS INTENSITY DISTRIBUTION

